



GOECO2500 PNEUMATIC COIL SPRING COMPRESSOR WORKSTATION - 2.5 TON

GOECO2500



A practical and
safe glove
compartment

Protection system
with interlocks

Vice for the
hydraulic part of
the shock absorber
Ø40 - 60 mm
(STANDARD)



Control pedal

Double cylinder with safety
control/stop valves



GO	CODE	325
T	with 2 pcs.	kg 65 kg
§	PATENTED	



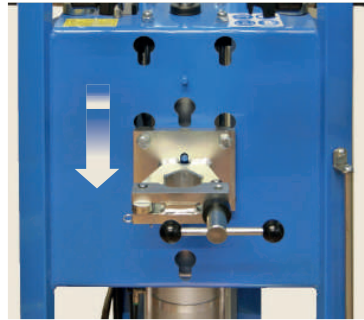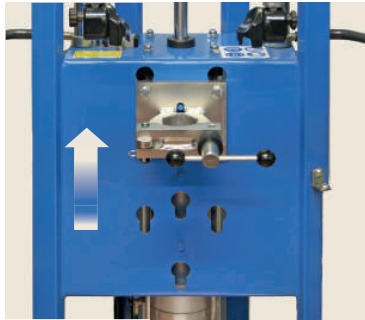

POSSIBILITY OF DOUBLE POSITIONING of the bracket to have more space and stroke for spring compression.



IF THE SAFETY GUARD REMAINS OPEN, THE MACHINE IS EQUIPPED WITH A SAFETY VALVE THAT DOES NOT ALLOW WORKING OPERATIONS

ECO2500

2.5 TON



TECHNICAL DATA

Power	2.5 Ton
Cylinder stroke	330 mm
Working pressure	10 bar
Spring compression capacity	30 - 330 mm
Spring exterior	Ø40 - 60 mm
Dry cycle consumption	0.11 m³/h - 1.83 Lt/min
Charge cycle consumption	0.04 m³/h - 0.67 Lt/min
Noise level	≤ 70 dB (A)

THE SUPPLY INCLUDES

Basic unit	2.5 TON
Vice for the hydraulic part of the shock absorber	Ø40 - 60 mm

