



TOTAL DESIGN FOR
BEST PERFORMANCE



APP
OKSYSGEN



DUA-LITE

INNOVATION IN THE **A/C RECHARGING SERVICE**

What the **SERIE 300** represents

Following the success of the 300 Series, the new **300 IRC Series** is the result of **Oksys'** great experience in the A/C service machines field.

In a modern workshop, having complete remote control of the equipment is increasingly necessary.

Oksys, with its own internal resources, has developed a new, continuously updated line which facilitates the use of the A/C service machines and simplifies the work in the workshop, making on-line reports available to inform the customer and making a series of useful information available online (performed services, databases, etc.).



CONNECTION VIA BLUETOOTH TO OKSYGEN

- Remote control of operations
- Instant updating of the database
- Remote control of the machine (START and STOP) and A/C system diagnosis
- Remote assistance
- Report of all services made, to be displayed on a Tablet / Smartphone or PC and to be sent to the customers



REDUCED SERVICE AND MAINTENANCE COSTS

- Up to 95% refrigerant recovery in accordance with SAE J2788
- Filter drier change after 100 Kg of recovered refrigerant
- Vacuum pump oil replacement after 80 hours of vacuum
- Simple access to all components for easy maintenance



RELIABILITY

- High precision electronic scales to avoid frequent calibrations
- Accurate refrigerant charging, with protection system for the vehicle's compressor
- Internal self-diagnosis



GREEN/SUSTAINABLE

- Fully recyclable packaging
- High efficiency distiller and condenser to reduce consumption
- Low energy consumption solenoid valve technology
- Remote Assistance





Intelligent Remote Control



The advantages of the **IRC** SERIES

STATUS
INDICATOR
LIGHT



INTEGRATED
DIAGNOSIS WITH
TEMPERATURE
PROBES



ERGONOMIC USE
VIA KEYBOARD
AND GRAPHIC
DISPLAY



HERMETIC
REFILLABLE OIL
BOTTLES
"OIL LOCK"



OIL
LOCK



INTEGRATED
BLUETOOTH
AS STANDARD



REMOTE ASSISTANCE
WITH LOG-IN TO THE
OKSYSLAB PORTAL



REMOTE CONTROL
VIA TABLET
OR SMARTPHONE

READY FOR HYBRID
AND ELECTRIC
VEHICLES
WITH CIRCULAR
INTERNAL
FLUSHING



READY FOR LEAK
TESTS WITH THE
USE OF NITROGEN
OR FORMING GAS



INTEGRATED
REFRIGERANT
ANALYSIS



FACILITATED
SCALE LOCK
AND CALIBRATION



-->



POSSIBLE
RECONFIGURATION FROM
HF01234YF TO R134a




A/C SYSTEM
FLUSHING

THE EXPERIENCE

Oksys
LAB

www.oksyslab.com

- On-line manuals
- On-line exploded views and technical information
- Control of the installed stations
- Maintenance management
- Database
- Tutorials

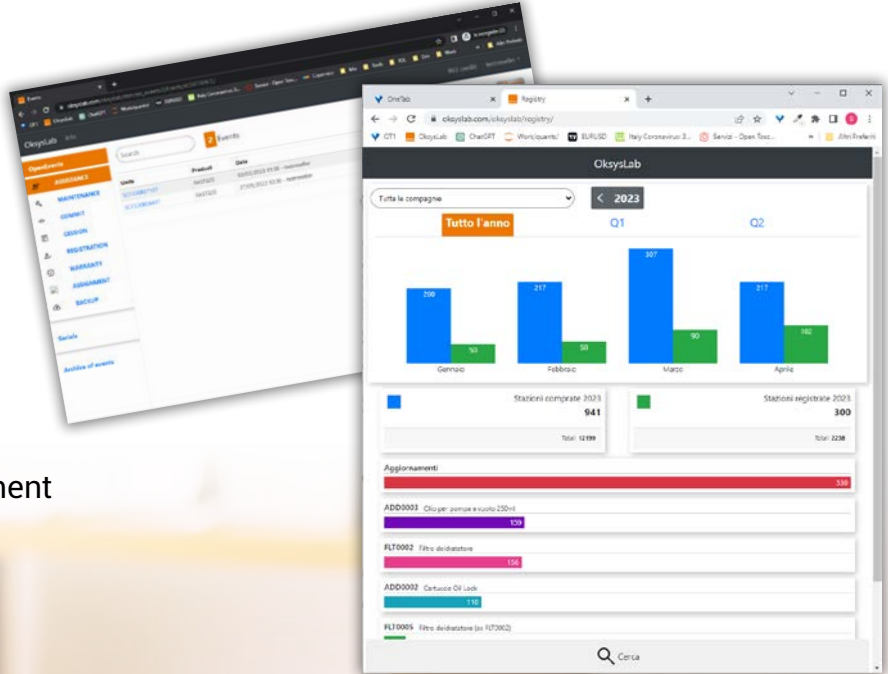



Oksy^sGen+

The OKSYGEN APP

AN ESSENTIAL DEVICE TO COMPLETE ALL THE FUNCTIONS OF THE A/C STATION

- Database always updated and possibility to create a customized database
- Visualization of the services performed and sending of the receipt to the customer
- Reset counters
- Online monitors





















The **FAST** Series

FAST 342 / FAST 342 YF / FAST 322 / FAST 322 YF
FAST 302 / FAST 302 YF







✓ STANDARD ● OPTION

CHARACTERISTICS

	FAST 342	FAST 342 YF	FAST 322	FAST 322 YF	FAST 302	FAST 302 YF
	SCF342R	SCF342H	SCF322R	SCF322H	SCF302R	SCF302H
TYPE OF REFRIGERANT						
 AUTOMATIC WORKING CYCLE No manual taps	✓	✓	✓	✓	✓	✓
 HIGH PRECISION RECOVERY FUNCTION	✓	✓	✓	✓	✓	✓
 AUTOMATIC OIL INJECTION with scale and refillable/ hermetic bottles (OIL LOCK)	✓	✓	✓	✓	✓	✓
AUTOMATIC DYE INJECTION with scale and refillable/ hermetic bottles (OIL LOCK) O-PK00096	✓	✓	✓	✓	●	●
HEATER BELT INCLUDED	✓	✓	✓	✓	✓	✓
USB PORT	✓	✓	✓	✓	✓	✓
INTERNAL DATA BASE including commercial and agricultural vehicles	✓	✓	✓	✓	✓	✓
 INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK (STL0003 / STL05xx / STL0017)	✓	✓	●	●	●	●
STATUS INDICATORS	✓	✓	✓	✓		
 READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	✓	✓	✓	✓	✓	✓
 INTERNAL FLUSHING	✓	✓	✓	✓	✓	✓
 A/C SYSTEM PROFESSIONAL FLUSHING (ACC-FLUSHING / ACC-EASYFLUSH PLUS)	●	●	●	●	●	●
 A/C SYSTEM DIAGNOSYS	✓	✓				
 CONFIGURABLE GAS TYPE from HFO1234YF to --> R134a O-PK00097 / O-PK00099		✓		✓		✓
 BLUETOOTH CONNECTION APP OKSY [®] GEN+	✓	✓	✓	✓	✓	✓



ACCESSORIES

	FAST 342	FAST 342 YF	FAST 322	FAST 322 YF	FAST 302	FAST 302 YF
 CODE ACC-88.072	DESCRIPTION Gas bottle adapter ¼					
 ACC-88.011	Straight adapter HP ¼					
 ACC-88-289H	Universal bottle adapter HFO1234YF					
 O-PK00051 O-PK00051 OPZ	Printer kit					
 GAS ID GAS ID OPZ	SAE J 2843 internal HFO1234YF refrigerant identifier kit					
 ACC-BLK-FAST300	Antidust Blanket					




FAST 342 YF IRC



FAST 302 IRC



FAST 322 YF IRC

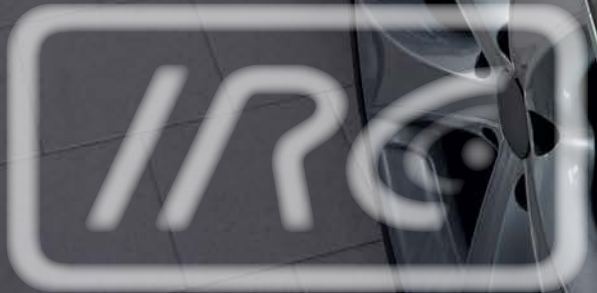



















The ECOS Series

ECOS 302 / ECOS 302 YF

✓ STANDARD ● OPTION

CHARACTERISTICS

	ECOS 302	ECOS 302 YF	
	SCE302R	SCE302H	
TYPE OF REFRIGERANT			
 AUTOMATIC WORKING CYCLE No manual taps	✓	✓	
 HIGH PRECISION RECOVERY FUNCTION	✓	✓	
AUTOMATIC OIL INJECTION refillable/hermetic bottles (OIL LOCK)	✓	✓	
 AUTOMATIC DYE INJECTION refillable/hermetic bottles (OIL LOCK) O-PK00096	●	●	
HEATER BELT INCLUDED	✓	✓	
USB PORT	✓	✓	
INTERNAL DATA BASE including commercial and agricultural vehicles	✓	✓	
 INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK (STL0003 / STL05xx)	●	●	
 INTERNAL FLUSHING	✓	✓	
 READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	✓	✓	
  CONFIGURABLE GAS TYPE from HFO1234YF to --> R134a O-PK00099		✓	
  BLUETOOTH CONNECTION APP OKSY [®] GEN+	✓	✓	

ACCESSORIES

	CODE	DESCRIPTION	ECOS 302	ECOS 302 YF
	ACC-88.072	Gas bottle adapter 1/4	●	
	ACC-88.011	Straight adapter HP 1/4	●	
	ACC-88-289H	Universal bottle adapter HFO1234YF		●
	O-PK00051 O-PK00051 OPZ	Printer kit	●	●
	ACC-BLK-ECOS300	Antidust Blanket	●	●





The **AGRICOLD** Series

AGRICOLD 302 / AGRICOLD 302 YF

✓ STANDARD ● OPTION

CHARACTERISTICS

	AGRICOLD 302	AGRICOLD 302 YF	
	SCG302R	SCG302H	
TYPE OF REFRIGERANT			
 AUTOMATIC WORKING CYCLE No manual taps	✓	✓	
 HIGH PRECISION RECOVERY FUNCTION	✓	✓	
 AUTOMATIC OIL INJECTION refillable/hermetic bottles (OIL LOCK)	✓	✓	
 AUTOMATIC DYE INJECTION refillable/hermetic bottles (OIL LOCK)	O-PK00096	●	●
HEATER BELT INCLUDED	✓	✓	
USB PORT	✓	✓	
INTERNAL DATA BASE including commercial and agricultural vehicles	✓	✓	
 INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK (STL0003 / STL05xx)	●	●	
 INTERNAL FLUSHING	✓	✓	
 READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	OAC0006	●	
 A/C SYSTEM PROFESSIONAL FLUSHING (ACC-FLUSHING)	●	●	
 A/C SYSTEM DIAGNOSYS	✓	✓	
 CONFIGURABLE GAS TYPE from HFO1234YF to --> R134a	O-PK00099	✓	
 BLUETOOTH CONNECTION APP OKSY [®] GEN+	✓	✓	 

ACCESSORIES

	CODE	DESCRIPTION	AGRICOLD 302	AGRICOLD 302 YF
	ACC-88.072	Gas bottle adapter ¼	●	
	ACC-88.011	Straight adapter HP ¼	●	
	ACC-88-289H	Universal bottle adapter HFO1234YF		●
	O-PK00051 O-PK00051 OPZ	Printer kit	●	●
	OAC0002-KIT	12 V Power supply	●	●
	ACC-BLK / AGRI 300	Antidust blanket	●	●
















The **AGRILITE** Series

AGRILITE 302 / AGRILITE 302 YF







✓ STANDARD ● OPTION

CHARACTERISTICS

	AGRILITE 302	AGRILITE 302 YF
	SCG302R	SCG302H
		
 AUTOMATIC WORKING CYCLE Without Manual Taps	✓	✓
 HIGH PRECISION RECOVERY FUNCTION	✓	✓
 AUTOMATIC OIL INSERTION with scales and with hermetic refillable bottles (OIL LOCK)	✓	✓
HEATING BELT	●	●
USB PORT	✓	✓
 LEAK DETECTOR WITH INTEGRATED NITROGEN AND HYDRO-NITROGEN (STL0003 / STL05xx)	●	●
INTERNAL DATABASE Oksyslab registration included	✓	✓
 CAN BE USED WITH HYBRID OR ELECTRIC VEHICLES (quick oil decontamination function) PLS0005.L9	●	●
INTERNAL WASH	✓	✓
  CONFIGURABLE GAS TYPE from HF01234YF to --> R134a O-PK00099	✓	✓
  BLUETOOTH CONNECTION APP OKSY [®] GEN+	✓	✓



ACCESSORIES

	AGRILITE 302	AGRILITE 302 YF
 CODE ACC-88.072 DESCRIPTION Gas bottle adapter ¼	●	
 ACC-88.011 Straight adapter HP ¼	●	
 ACC-88-289H Universal bottle adapter HF01234YF		●
 O-PK00051 O-PK00051 OPZ Printer kit	●	●
 OPK-00164-OPZ Pressurization kit	●	●
 AOC-0007 / AOC-0009 Support Trolley for AGRILITE and DUA-LITE	●	●
 KTB0013.L1 KTB0015.L1 Kit HP + LP 3 m hoses / Quick couplers (R134a) Kit HP + LP 7,5 m hoses / Quick couplers (R134a)	●	
 KTB0012.L1 KTB0014.L1 Kit HP + LP 3 m hoses / Quick couplers (HF01234YF) Kit HP + LP 7,5 m hoses / Quick couplers (HF01234YF)		●
 OAC-0002+CBL0007 12 V Power supply	●	●
 ACC-BLK / AGLT 300 Antidust blanket	●	●



NEW

DUA-LITE



The HD Series

HD 302 / HD 302 YF

✓ STANDARD ● OPTION

CHARACTERISTICS

	HD 302	HD 302 YF
	SCH302R	SCH302H
TYPE OF REFRIGERANT		
 AUTOMATIC WORKING CYCLE No manual taps	✓	✓
 HIGH PRECISION RECOVERY FUNCTION	✓	✓
 AUTOMATIC OIL INJECTION refillable/hermetic bottles (OIL LOCK)	✓	✓
AUTOMATIC DYE INJECTION refillable/hermetic bottles (OIL LOCK) O-PK00096	✓	✓
HEATER BELT INCLUDED	✓	✓
USB PORT	✓	✓
INTERNAL DATA BASE including commercial and agricultural vehicles	✓	✓
 INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK (STL0003 / STL05xx)	●	●
 CAN BE USED WITH HYBRID OR ELECTRIC VEHICLES (quick oil decontamination function)	✓	✓
 INTERNAL FLUSHING	✓	✓
 A/C SYSTEM PROFESSIONAL FLUSHING (ACC-FLUSHING / ACC-EASYFLUSH PLUS)	●	●
 A/C SYSTEM DIAGNOSYS	✓	✓
 CONFIGURABLE GAS TYPE from HF01234YF to --> R134a O-PK00097		✓
 BLUETOOTH CONNECTION APP OKSY [®] GEN+	✓	✓



ACCESSORIES

	CODICE	DESCRIZIONE	HD 322	HD 322 YF
	ACC-88.072	Gas bottle adapter ¼	●	
	ACC-88.011	Straight adapter HP ¼	●	
	ACC-88-289H	Universal bottle adapter HF01234YF		●
	GEAR PUMP	Gear pump 1 L/min.	●	●
	O-PK00051 O-PK00051 OPZ	Printer kit	●	●
	GAS ID GAS ID OPZ	SAE J 2843 internal HF01234YF refrigerant identifier kit	●	●



RANGE

R134a



HF01234YF

MODEL	FAST 342	FAST 322	FAST 302	ECOS 302	FAST 342 YF
-------	----------	----------	----------	----------	-------------

TECHNICAL FEATURES

Process	Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic
Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel	Graphic LCD 128x64 Pixel	Graphic LCD 128x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES	YES	YES	YES
Tank Capacity	18 Kg	18 Kg	12 Kg	9 Kg	12 Kg
Heater Belt	YES	YES	YES	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g	+/- 5 g	+/- 5 g	+/- 5 g
Automatic Oil Injection	YES 1 Scale	YES 1 Scale	YES 1 Scale	YES	YES 1 Scale
Automatic Dye Injection	YES 1 Scale	YES 1 Scale	Option	Option	YES 1 Scale
Printer	YES	YES	Option	Option	YES
Compressor	10 cc	10 cc	10 cc	10 cc	10 cc
Vacuum Pump	100 l/min	100 l/min	70 l/min	50 l/min	100 L/min
Air Purge	Automatic High Precision	Automatic	Automatic	Automatic	Automatic High Precision
Stauts Indicators	YES	YES	NO	NO	YES
Data Base	YES	YES	YES	YES	YES
A/C Diagnostic / AC Pressure Test	YES	YES	AC Pressure Test Only	AC Pressure Test Only	YES
Hybrid Function	YES Rapid oil decontamination	YES Rapid oil decontamination	YES	YES	YES Rapid oil decontamination
Nitrogen Leak Check	Automatic	Option/Semiautomatic	Option/Semiautomatic	Option/Semiautomatic	Automatic
Refrigerant HF01234YF Identifier	NO	NO	NO	NO	Opzione
A/C Flushing Kit	Option	Option	Option	NO	Option
Bluetooth Connection	YES	YES	YES	YES	YES
Remote Control / Interface	YES via Bluetooth	YES via Bluetooth	YES via Bluetooth	YES via Bluetooth	YES via Bluetooth
Charging Gear Pump	NO	NO	NO	NO	NO
12 V Power Supply	NO	NO	NO	NO	NO
Power Supply	220V 50 Hz	220V 50 Hz	220V 50 Hz	220V 50 Hz	220V 50 Hz
Dimensions	58x55x120 cm	58x55x120 cm	51x48x94 cm	51x48x94 cm	58x55x120 cm
Weight	67/76 Kg	65/74 Kg	61/70 Kg	55/64 Kg	65/74 Kg
Packaging dimensions	63x63x123 cm	63x63x123 cm	63x63x123 cm	54x58x116 cm	63x63x123 cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	Included	Included	Included	Included	Included
Hoses	3m	3m	3m	3m	3m
Blanket	YES	YES	Option	Option	YES
Power Cord	YES	YES	YES	YES	YES
Calibration Handle	YES	YES	YES	YES	YES
Extra oil bottle	YES	YES	YES	YES	YES
2 x temperature probes	Included	Included	NO	NO	Included
OIL LOCK	YES	YES	YES	YES	YES


AGRI
Heavy Duty
FAST 322 YF
FAST 302 YF
ECOS 302 YF
AGRICOLD 302 / 302YF
AGRILITE 302 / 302YF
HD 302 / 302 YF

Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic	Fully Automatic
Graphic LCD 264x64 Pixel	Graphic LCD 128x64 Pixel	Graphic LCD 128x64 Pixel	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
YES	YES	YES	YES	YES	YES
12 Kg	12 Kg	9 Kg	12 Kg	8,4 Kg	40 Kg
YES	YES	YES	SI YES	Option	YES
+/- 5 g	+/- 5 g	+/- 5 g	+/- 5 g	+/- 5 g	+/- 5 g
YES 1 Scale	YES 1 Scale	YES	YES	YES	YES 1 Scale
YES 1 Scale	Option	Option	Option	NO	YES 1 Scale
YES	Option	Option	Option	Option	Option
10 cc	10 cc	10 cc	10 cc	10 cc	20 cc
100 L/min	70 L/min	50 L/min	100 L/min	50 L/min	200 L/min Dual Stage
Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
YES	NO	NO	NO	NO	NO
YES	YES	YES	YES	YES	YES
YES	AC Pressure Test Only	AC Pressure Test Only	AC Pressure Test Only	NO	AC Pressure Test Only
YES Rapid oil decontamination	YES	YES	Option (Rapid)	YES	YES Rapid oil decontamination
Option/Semiautomatic	Option/Semiautomatic	Option/Semiautomatic	Option/Semiautomatic	Option/Semiautomatic	Option/Semiautomatic
Opzione	Opzione	NO	NO	NO	Option
Option	Option	NO	Option	NO	Option
YES	YES	YES	YES	YES	YES
YES via Bluetooth	YES via Bluetooth	YES via Bluetooth	YES via Bluetooth	YES via Bluetooth	YES via Bluetooth
NO	NO	NO	NO	NO	Option
NO	NO	NO	Option	YES	NO
220V 50 Hz	220V 50 Hz	220V 50 Hz	220V 50 Hz 12V DC	220V 50 Hz 12V	220V 50 Hz
58x55x120 cm	54x58x99 cm	52x56x99 cm	55x63x86 cm	50x44x62 cm	55x60x120 cm
65/74 Kg	61/70 Kg	57/66 Kg	62/71 Kg	45/48 Kg	117/126 Kg
63x63x123 cm	63x63x123 cm	54x58x116 cm	68x57x100 cm	58x54x77 cm	80x60x145 cm
Included	Included	Included	Included	Option	Included
3m	3m	3m	7,5 m	Option	3 m
YES	Option	Option	Option	Option	NO
YES	YES	YES	YES	YES	YES
YES	YES	YES	YES	YES	YES
YES	YES	YES	Option	Option	YES
Included	NO	NO	NO	NO	Included
YES	YES	YES	YES	YES	YES

SPECIAL TOOLS



LEAK DETECTOR WITH NITROGEN OR FORMING GAS

STL12xx (ex FU-NITRO.FULL-HD)

Forming gas leak detection
KIT COMPLETE



STL12xx

Including:

- Plastic box
- Pressure regulator
- 1 or 2.2 liter cylinders adapter
- Electronic leak detector
- Pipes and fittings
- Comparison pressure gauge





STL0003 (ex CFU-NITRO)

Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection

STL05xx (ex CFU-NITRO.HD.XX)

Kit for the connection 200 Bar bottles to the A/C station - Including:



- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2,2 L bottles
- Manifold for the A/C service station connection



CFU-NITRO.HD.XX





STL0003

	CODE	DESCRIPTION
	CFU-13.209	Nitrogen Hydrogen bottle 1l 40 BAR
	CFU-13.209/2	Nitrogen Hydrogen bottle 2,2l 40 BAR
	STL002 (ex CFU-12.036)	Electronic sniffer for Nitrogen/Hydrogen
	STL001 (ex CFU-12.033)	Electronic sniffer for R134a and HFO1234YF

SPECIAL TOOLS

A/C SYSTEM WASHING

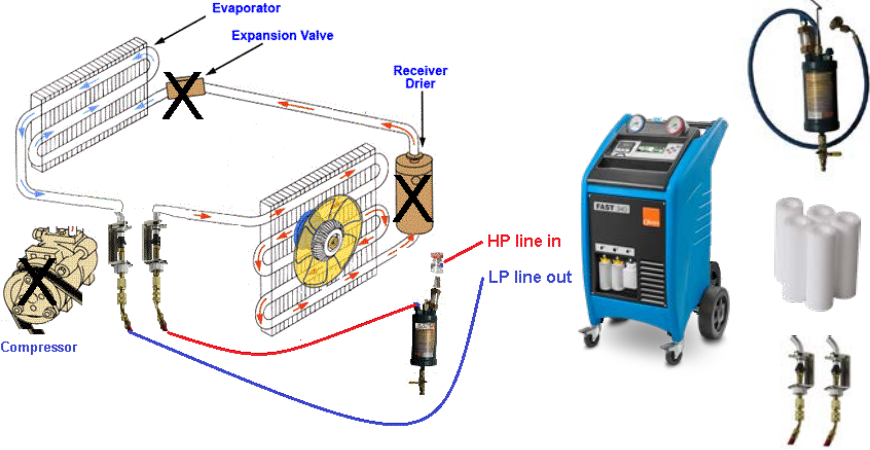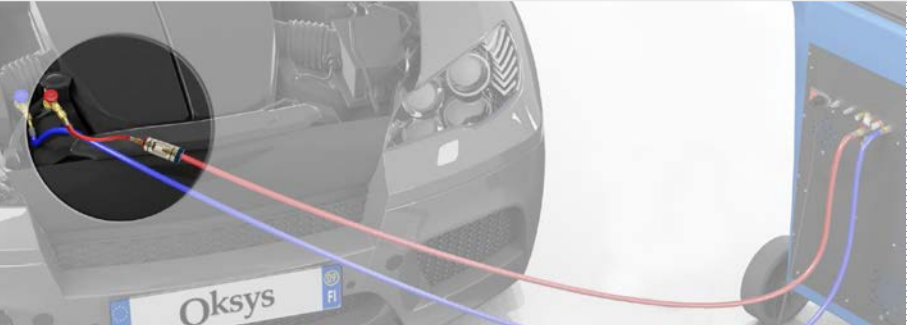	CODE	DESCRIPTION
	<p>ACC-FLUSHING ACC-FLUSHING.YF</p>	<p>Professional Refrigerant R134a or HF01234YF Flushing Kit inclusive of expansion</p>
	<p>STD0004</p>	<p>Visual Diagnostic Kit for EASYFLUSH</p>

REFRIGERANT ANALYSIS


	CODE	DESCRIPTION
	<p>STD0002 STD0003</p>	<p>Portable HF01234YF identifier Portable R134a identifier</p>

REFRIGERANT RECOVERY


	CODE	DESCRIPTION
	<p>STR0004 (ex ACC-UNREC-3/4HP) STR0005 (ex ACC-RECKIT-HF0-3/4HP)</p>	<p>Universal recovery unit compatible with refrigerants R134a and HF01234YF Complete recovery kit compatible with refrigerants R134a and HF01234YF Inclusive of hoses, connections and 8 lt tank and 100 kg electronic scale</p>

ADDITIVES / LEAK-DETECTION / ACCESSORIES





OIL ADDITIVES

	CODE	DESCRIPTION
	ADD-611.029	PAG 46 Oil for compressors for R134a - 6x250 ml
	ADD-611.080.U	PAG Universal Oil for compressors for R134a and HFO1234YF - 6x250 ml
	ADD-611.084.U	POE -Compressor oil for Hybrids Vehicles R134a and HFO1234YF -6x250 (Dielectric factor 75KW/2,5mm)
	ADD-611.501UV	PAG Universal Oil and DYE for compressors for R134a and HFO1234YF - 6x250 ml Metal packaging, 250 ml






DYE ADDITIVES

	CODE	DESCRIPTION
	CFU-611.005.U	Dye for R134a and HFO1234YF systems - pack of 6 bottle of 250 ml

LEAK DETECTION ACCESSORIES













	CODE	DESCRIPTION
	CFU-13.041	Piston dye/oil injector for R134a
	CFU-13.041YF	Piston dye/oil injector for HFO1234YF
	CFU-611.021T	Dye remover-multi purpose cleaner spray pack of 6 cans of 400 ml
	CFU-12.008	UV leak detection lamp with glasses
	CFU-12.007	UV leak detection lamp 60W with glasses
	CFU-12.003	UV leak detection lamp 60W with glasses - rechargeable

ACCESSORIES

	CODE	DESCRIPTION
	ACC-12.026	Digital Thermometer
	ACC-12.022	Infrared Thermometer
	ACC-13.092	Protective gloves
	ACC-12.011	Goggles
	ADD-611.024	Antibacterial Spray 6x20 ml





ADAPTERS / HOSES

ADAPTERS

	CODE	DESCRIPTION
	ACC-88.072	Bottle adapter ¼
	ACC-88.011	HP Adapter 180° ¼
	ACC-88.289H	Universal bottle adapter for HF01234YF
	O-PK00097 O-PK00099	Conversion kit from HF01234YF to R1234a x FAST 342, FAST 322, HD 302 Conversion kit from HF01234YF to R1234a x FAST 302, ECOS 302, AGRICOLD 302, AGRILITE 302
	ACC-13.038YF	FORD FIESTA low pressure extension
	ACC-13.039YF	FORD FIESTA high pressure extension
	ACC-13.038D ACC-13.038DYF	BMW Quick coupling
	ACC-13.095 ACC-13.095YF	RENAULT Quick coupling
	RCD0103.L1	LP quick connection Parker (R134a)
	RCD0104.L1	HP quick connection Parker (R134a)
	RCD0106	LP quick connection Parker (HF01234YF)
	RCD0105	HP quick connection Parker (HF01234YF)









HOSES

	CODE	DESCRIPTION
	TBZ0001	LP hose 3 m (blue) (HF01234YF)
	TBZ0002	HP hose 3 m (red) (HF01234YF)
	TBZ0003	LP hose 3 m (blue) (R134a)
	TBZ0004	HP hose 3 m (red) (R134a)
	ACC-HS75set2	Set of 2 hoses 7,5 m (R134a)
	ACC-HS75set2 YF	Set of 2 hoses 7,5 m (HF01234YF)
	KTB0012.L1	Low and high pressure hoses 3 m + pair of PRO quick couplings (HF01234YF)
	KTB0013.L1	Low and high pressure hoses 3 m + pair of PRO quick couplings (R134a)
	KTB0014.L1	Low and high pressure hoses 7,5 m + pair of PRO quick couplings (HF01234YF)
	KTB0015.L1	Low and high pressure hoses 3 m + pair of PRO quick couplings (R134a)

MAINTENANCE

PERIODIC MAINTENANCE

	CODE	DESCRIPTION
	ADD-0003	Oil for vacuum pump 250 ml bottle
	ADD-0004	Oil for vacuum pump 250 ml bottle x6
	FLT0005	Dehydrating filter for families ECOS - FAST- AGRICOLD - AGRILITE
	FLT0026	Dehydrating filter for families ECOS - FAST- AGRICOLD - AGRILITE x6
	FLT0007	Dehydrating filter for HD202
	FLT0036	Dehydrating filter for HD202 x6
	A-88074N/20	Set of Neoprene Gaskets - 10 pcs
	ACC-9000009-10	Packing of 10 paper rolls for printer 57mm dia 33mm
	ACC-5SGLAS-F	Replacement filter for ACC-FLUSHING 5 units
	ADD-0001	Box with 6 OIL LOCK dehydrating cartridges



OIL LOCK




Eliminates humidity in oil bottles.

CERTIFICATE
premium
WORKSHOP

OIL

PATENTED SYSTEM

ACCESSORIES FOR MAINTENANCE

	CODICE	DESCRIZIONE
	ACC-12.031	Electronic scale
	ACC-12.033FK	4-ways pressure gauge kit - HFO1234YF
	ACC-12.033K	4-ways pressure gauge kit - R134a
	ACC-13.051	Valve needle extractor
	ACC-CAL	Load cell calibration kit
	BMB0012	7L refillable HFO1234YF refrigerant bottle
	OAC0005	300 Series USB Update Kit

OKSYS was founded in 2010, is present in over 40 countries around the world and produces over 2000 machines a year.

All Oksys production is designed and built within its own premises...

**TOTAL DESIGN FOR
BEST PERFORMANCE**



**TOTAL DESIGN FOR
BEST PERFORMANCE**

 oksys.com    

OKSYS srl Via dell'Albereto, 33D - 50041 Calenzano (FI) - ITALY
Tel. +39 055 8990665 Fax +39 055 8947382 info@oksys.com

www.oksys.com